



## Legend


### Important notes

The authors and Erbe Elektromedizin GmbH have taken the greatest possible care while compiling the catalogue with electrosurgical accessories. Nevertheless, it is impossible to exclude the possibility that errors may be contained herein.

The information and recommendations given here may not be construed as constituting any basis for any claims against Erbe Elektromedizin GmbH. Should legal regulations stipulate liability, such liability shall be limited to intentional misconduct or gross negligence.

The data on the use of instruments is based on clinical experience. Medical science is subject to a process of permanent change based on research and clinical experience. Therefore the products are subject to alterations in design and technique. Because of production tolerances dimensions in the catalogue may marginally differ.

### Further product information

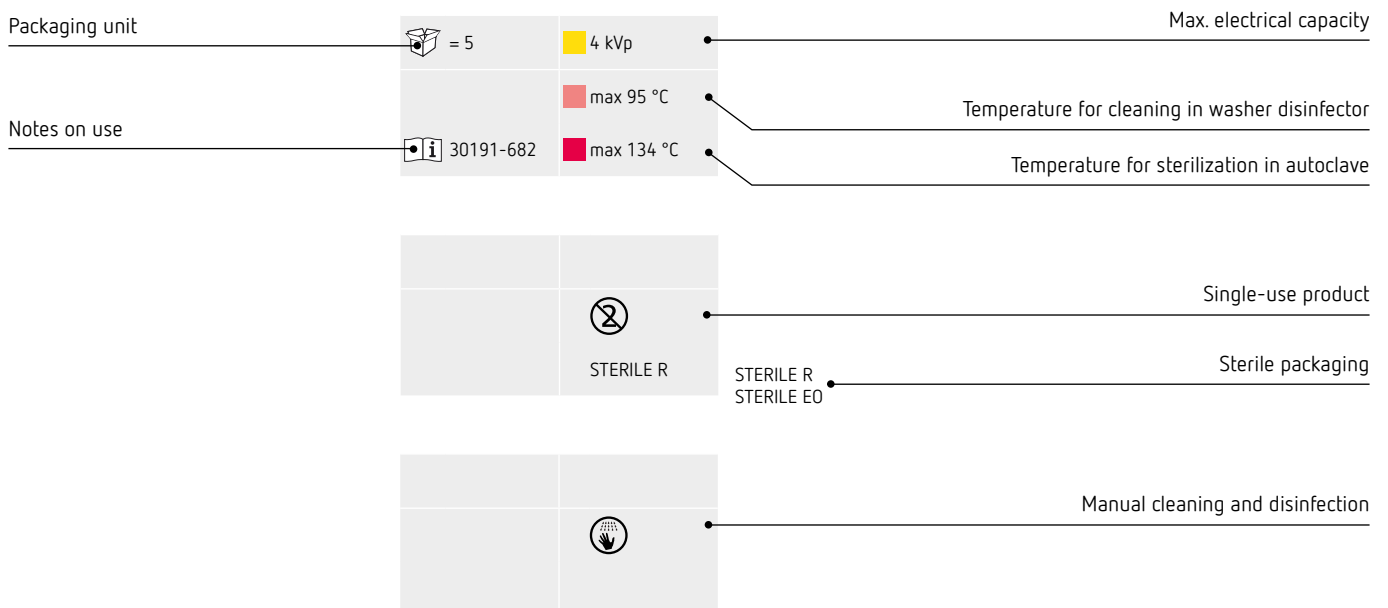

Please read carefully the corresponding notes on use before using any instrument.

# Argon plasma coagulation

---

## Instruments for APC

---

- 04 FiAPC probes, single-use
- 07 APCapplicator
- 09 APC applicators for APC handles
- 12 APC ignition test adapters
- 12 APC applicators for APC connecting cables

---

## Accessories for APC

---


- 13 APC pressure reducers and argon gas cylinder / further APC accessories

# Instruments for APC


## Beam forms



Axial beam  
A



Side Fire Conical Beam  
SC



Circumferential Beam  
C

### FiAPC probes, single-use

FiAPC probe 1500 A,  $\varnothing$  1.5 mm, flexible, length 1.5 m



with instrument recognition and integrated filter,  
e.g. for bronchoscopy

**No. 20132-220**

= 10

5 kVp

30132-344



STERILE EO

FiAPC probe 2200 A,  $\varnothing$  2.3 mm, flexible, length 2.2 m



with instrument recognition and integrated filter

**No. 20132-221**

= 10

5 kVp

30132-344



STERILE EO

# Instruments for APC

## FiAPC probes, single-use

FiAPC probe 2200 A,  $\varnothing$  3.2 mm, flexible, length 2.2 m



with instrument recognition and integrated filter

**No. 20132-222**

= 10

5 kVp

30132-344



STERILE EO

FiAPC probe 3000 A,  $\varnothing$  2.3 mm, flexible, length 3 m



with instrument recognition and integrated filter

**No. 20132-223**

= 10

5 kVp

30132-344



STERILE EO

FiAPC probe 2200 SC,  $\varnothing$  2.3 mm, flexible, length 2.2 m



with instrument recognition and integrated filter

**No. 20132-224**

= 10

5 kVp

30132-344




STERILE EO

# Instruments for APC

## FiAPC probes, single-use

FiAPC probe 2200 C,  $\varnothing$  2.3 mm, flexible, length 2.2 m

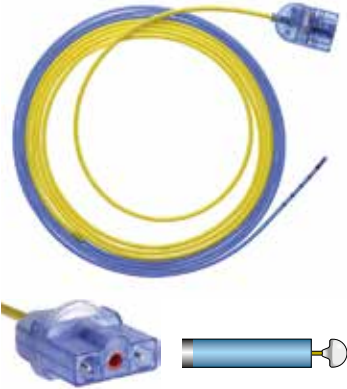

with instrument recognition and integrated filter

**No. 20132-225**

= 10

5 kVp

30132-344



STERILE EO

FiAPC probe 3000 A,  $\varnothing$  1.5 mm, flexible, length 3 m



with instrument recognition and integrated filter,  
e.g. for double-balloon enteroscopy

**No. 20132-226**

= 10

5 kVp

30132-344



STERILE EO

Adapter for FiAPC probes



for connection with APC 2 / APC 300

**No. 20132-227**

= 1

4.3 kVp

30132-346

max 95 °C

max 138 °C

# Instruments for APC

## APCapplicator

APCapplicator, with filter, shaft 35 mm, rigid, spatula electrode

ReMode, with connecting cable 3 m



**No. 20132-250**



4.3 kVp

30132-478



STERILE EO

APCapplicator, with filter, shaft 35 mm, rigid, needle electrode

ReMode, with connecting cable 3 m



**No. 20132-251**



4.3 kVp

30132-478



STERILE EO

APCapplicator, with filter, shaft 100 mm, rigid, spatula electrode

ReMode, with connecting cable 3 m



**No. 20132-252**



4.3 kVp

30132-478



STERILE EO

APCapplicator, with filter, shaft 100 mm, rigid, needle electrode

ReMode, with connecting cable 3 m



**No. 20132-253**



4.3 kVp

30132-478



STERILE EO

# Instruments for APC

## APCapplicator

APCapplicator, with filter, shaft 350 mm, rigid, spatula electrode

ReMode, with connecting cable 3 m



**No. 20132-254**



= 5

4.3 kVp



30132-478

STERILE EO

APCapplicator, with filter, shaft 350 mm, rigid, needle electrode

ReMode, with connecting cable 3 m



**No. 20132-255**



= 5

4.3 kVp



30132-478

STERILE EO

APCapplicator, with filter, shaft 100 mm, bendable, 1 button (coagulation)



**No. 20132-256**



= 5

4.3 kVp



30132-478

STERILE EO

Adapter for connection to APC 2 with standard APC socket



**No. 20132-249**



= 1

4.3 kVp

max 95 °C



30132-491


max 138 °C



# Instruments for APC

## APC applicators for APC handles

APC applicator, ø 5 mm, rigid, length 25 mm



**No. 20132-031**



4.3 kVp

max 95 °C



30132-041

max 138 °C

APC applicator, ø 5 mm, rigid, length 100 mm



**No. 20132-032**



4.3 kVp

max 95 °C



30132-041

max 138 °C

APC applicator, ø 5 mm, rigid, length 320 mm



**No. 20132-034**



4.3 kVp

max 95 °C



30132-041

max 138 °C

APC applicator, ø 5 mm, rigid, length 320 mm

with hook electrode



**No. 20132-084**



4.3 kVp

max 95 °C




30132-041

max 138 °C

APC applicator, ø 5 mm, rigid, length 35 mm

with adjustable needle electrode

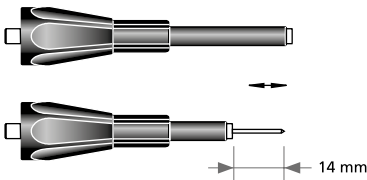

**No. 20132-054**



4.3 kVp

max 95 °C




30132-041

max 138 °C

APC applicator, ø 5 mm, rigid, length 35 mm

with adjustable spatula

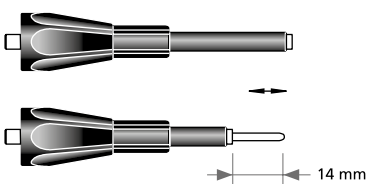

**No. 20132-057**



4.3 kVp

max 95 °C



30132-041

max 138 °C

# Instruments for APC

## APC applicators for APC handles

APC applicator,  $\varnothing$  5 mm, rigid, length 100 mm

with adjustable needle



**No. 20132-044**



= 1

4.3 kVp

max 95 °C



30132-041

max 138 °C

APC applicator,  $\varnothing$  5 mm, rigid, length 100 mm

with adjustable spatula



**No. 20132-056**



= 1

4.3 kVp

max 95 °C



30132-041

max 138 °C

APC applicator,  $\varnothing$  5 mm, rigid, length 220 mm

with adjustable needle



**No. 20132-211**



= 1

4.3 kVp

max 95 °C




30132-332

max 138 °C

APC applicator,  $\varnothing$  5 mm, rigid, length 320 mm

with adjustable spatula

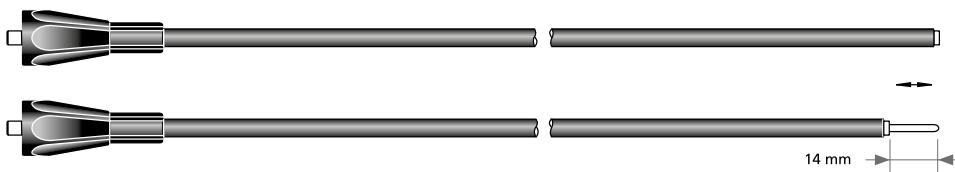

**No. 20132-133**



= 1

4.3 kVp

max 95 °C



30132-332

max 138 °C

APC applicator,  $\varnothing$  6 mm, flexible, length 100 mm



**No. 20132-033**



= 1

4.3 kVp

max 95 °C



30132-041

max 138 °C

# Instruments for APC

## APC applicators for APC handles

APC applicator, ø 6 mm, flexible, length 200 mm



**No. 20132-140**



4.3 kVp

max 95 °C



30132-041

max 138 °C

APC applicator, ø 6 mm, tip flexible, length 320 mm



**No. 20132-040**



4.3 kVp

max 95 °C



30132-041

max 138 °C

APC handles/irrigation adapters	Length	Piece	No.
VIO APC ReMode handle with 3 buttons for APC 2, with connecting cable, with instrument recognition	3 m	1	<b>20132-200</b>
APC handle with 2 buttons, APC 2/VIO, APC 300/ICC, with connecting cable, with instrument recognition	3 m	1	<b>20132-043</b>
Irrigation for adapter APC applicators with Luer-Lock, for APC applicators with APC handles		5	<b>20132-087</b>

APC handles and APC applicators, reusable  
are not compatible with VIO 3/APC 3

# Instruments for APC

## APC ignition test adapters

not compatible with VIO 3/APC 3

### APC ignition test adapter for VIO D/S, ICC, Standard (NE 6 mm)



**No. 20183-070**

= 1

max 95 °C

30183-126

max 134 °C

### APC ignition test adapter for VIO D/S, ICC, International (NE 2-Pin)



**No. 20183-071**

= 1

max 95 °C


30183-126

max 138 °C

## APC applicators for APC connecting cables, APC 2/APC 300

not compatible with VIO 3/APC 3

### APC applicator 110 SC, $\varnothing$ 2.3 mm, rigid, length 110 mm

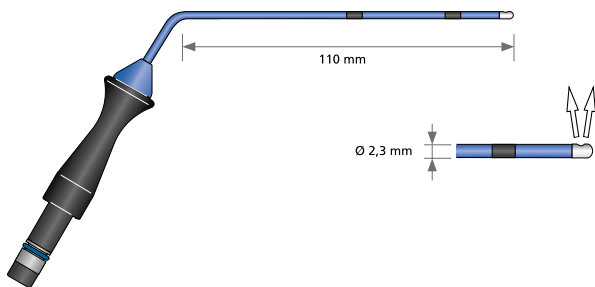

**No. 20132-106**

= 1


4.3 kVp

max 95 °C

30132-245

max 138 °C

### APC applicator 240 SC, $\varnothing$ 2.3 mm, rigid, length 240 mm

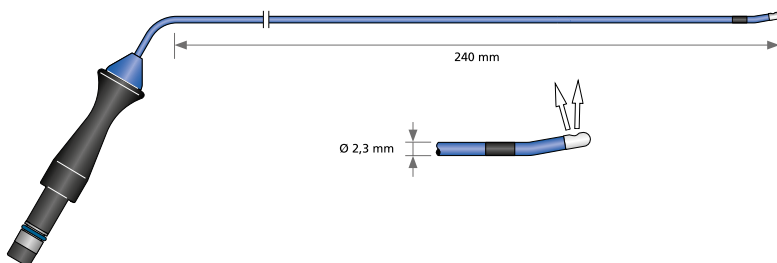

**No. 20132-110**

= 1

4.3 kVp

max 95 °C

30132-245

max 138 °C

### APC connecting cable/irrigation adapter

Connecting cable for APC applicators, APC 2/VIO, APC 300/ICC



Length

2.5 m

Piece

1

No.

**20132-046**

Irrigation adapter for APC applicators with Luer Lock



Piece

5

**20132-095**

### Country-specific gas cylinder connectors APC 3, APC 2, APC 300

**A****DIN 477, Nr. 6 m**

for Afghanistan, Algeria, Andorra, Argentina **B\***, Austria, Bangladesh **D\***, Belgium, Bhutan, Brazil **B\***, Brunei, Caribbean Countries, Chile **B\***, China, Croatia, Cyprus, Czech Republic, Egypt, Estonia, France, Germany, Greece, Hungary, Iceland, India **D\***, Indonesia, Iran, Ireland, Israel, Japan, Korea North, Korea South, Kuwait **D\***, Latvia, Lebanon, Libya, Liechtenstein, Lithuania, Luxembourg, Macedonia, Malaysia, Malta, Mauritius, Morocco, Myanmar, Namibia, Nepal **D\***, Oman **D\***, Pakistan **D\***, Peru **B\***, Philippines, Poland, Portugal, Qatar **D\***, Romania, Russia, Saudi Arabia **D\***, Singapore, Slovakia, Slovenia, South Africa, Spain, Sri Lanka **D\***, Sudan, Switzerland, Taiwan (ROC), Thailand **D\***, Tunisia, Turkey, Ukraine, United Arab Emirates **D\***, Uruguay, Vietnam **D\***, Yemen **D\***, Yugoslavia

**B****CGA Nr. 580 m**

for Argentina **A\***, Bolivia, Brazil **A\***, Canada, Chile **A\***, Columbia, Dominican Republic, Ecuador, El Salvador, Guam, Guatemala, Haiti, Honduras, Italy, Mexico, New Zealand, Panama, Peru **A\***, USA, Venezuela

**C****DIN 477, Nr. 10 m**

for Denmark, Finland, Ivory Coast, Netherlands, Norway, Sweden

**D****BS 341, Nr. 3 m**

for Australia, Bangladesh **A\***, Great Britain, India **A\***, Kuwait **A\***, Nepal **A\***, Northern Ireland, Oman **A\***, Pakistan **A\***, Qatar **A\***, Saudi Arabia **A\***, Sri Lanka **A\***, Thailand **A\***, United Arab Emirates **A\***, Vietnam **A\***, Yemen **A\***

# Accessories for APC

## APC pressure reducers and argon gas cylinder / further APC accessories

### Pressure reducer with sensor for APC 2/APC 3, with manual connection



gas cylinder connector to DIN 477 No. 6 m, W 21,8 outside, with hose 0,5 m with manual connection

**No. 20134-004**

= 1

30134-008

**A**

### Argon gas cylinder, 5 liters, empty



gas cylinder connector to DIN 477 No. 6 m dimensions: height 60 cm, ø 14 cm weight 8,8 kg

**No. 20132-171**

= 1

**A**

### Argon gas cylinder, 5 liters, 200 bar (2800 psi) filled with 4.8 argon gas (99,998%)



gas cylinder connector to DIN 477 No. 6 m dimensions: height 60 cm, ø 14 cm weight 10,7 kg

**No. 20132-004**

= 1

**A**

### Pressure reducer with sensor for APC 2/APC 3, with manual connection



gas cylinder connector to CGA No. 580 m, 0,965" inside, with hose 0,5 m

**No. 20134-002**

= 1

30134-008

**B**

### Argon gas cylinder, 5 liters, empty



gas cylinder connector to CGA No. 580 m dimensions: height 60 cm, ø 14 cm weight: 8,1 kg

**No. 20132-165**

= 1

**B**

### Pressure reducer with sensor for APC 2/APC 3



**No. 20134-006**

= 1

30134-008

**B**

## Accessories for APC

### APC pressure reducers and argon gas cylinder / further APC accessories

Pressure reducer with sensor for APC 2/APC 3, with manual connection



gas cylinder connector to DIN 477 No. 10 m, W 24,32 outside, with hose 0,5 m with manual connection

**No. 20134-001**

= 1

30134-008

**C**

Pressure reducer with sensor for APC 2/APC 3, with manual connection



gas cylinder connector to BS 341 No. 3 m, G 5/8" inside, with hose 0,5 m, with manual connection

**No. 20134-003**

= 1

30134-008

**D**

Pressure reducer with sensor for APC 2/APC 3



**No. 20134-005**

= 1

30134-008

**Japan**

Pressure reducer with sensor for APC 2/APC 3, with manual connection



gas cylinder connector to ISO 5145 n°4, with hose 0.75 m

**No. 20134-007**

= 1

D130245

**France**

Pressure reducer without sensor for APC 300, with manual connection



gas cylinder connector to ISO 5145 n°4, with hose 0,75 m

**No. 20132-078**

= 1

D130245

**France**

Connecting tube for central gas supply, APC 2/APC 3, APC 300, length 1 m



**No. 20132-085**

= 1

#### Important information

The information, recommendations and other details contained in this medium ("information") reflect our state of knowledge and the state of the art in science and technology at the time the medium was created. The information is of a general nature, non-binding and intended solely for general information purposes; it does not constitute instructions for use.

The information and recommendations contained in this medium do not create any legal obligations on the part of Erbe Elektromedizin GmbH and its affiliated companies ("Erbe") or any other claims against Erbe. The information does not constitute any guarantees or other information on the nature of the product; such information requires an express contractual agreement with Erbe in each individual case.

Erbe is not liable for any kind of damage resulting from following the information on this medium, regardless of any legal grounds for liability.

Every user of an Erbe product is responsible for testing the respective Erbe product in advance with regard to its properties and its suitability for the intended type of use or purpose. Suitable type of use of the respective Erbe product can be found in the instructions for use for the respective Erbe product. The user is obliged to ascertain whether the instructions for use available to him/her correspond to the current status of the specific Erbe product. Devices may only be used in accordance with the instructions for use.

Information on settings, application sites, application duration and use of the respective Erbe product is based on the clinical experience of individual centers, physicians and clinical literature independent of Erbe as well as post market surveillance and empirical evidence. They constitute reference values, or Experienced Starting Settings, which must be checked by the user to ensure that they are suitable for the specifically planned application. Depending on the circumstances of a specific application, it may be necessary to deviate from the information provided. The user is responsible for checking this when using Erbe products. We wish to note that science and technology are subject to constant development as a result of research and clinical experience. Similarly, medicine and clinical application are constantly evolving as a result of research and technological development. This may also make it necessary for the user to deviate from the information provided on this medium.

This medium contains information about Erbe products that may not be approved/cleared in certain countries. The user of the respective Erbe product is obliged to inform himself/herself as to whether the Erbe product he/she is using is legally approved/cleared in his/her country and/or to what extent, if any, there are legal requirements for or restrictions on its use.

This medium is not intended for use in the USA.

Erbe Elektromedizin GmbH  
Waldhoernlestrasse 17  
72072 Tuebingen  
Germany

Phone +49 7071 755-0  
info@erbe-med.com  
erbe-med.com  
medical-videos.com